


FSD Serie FF4-4

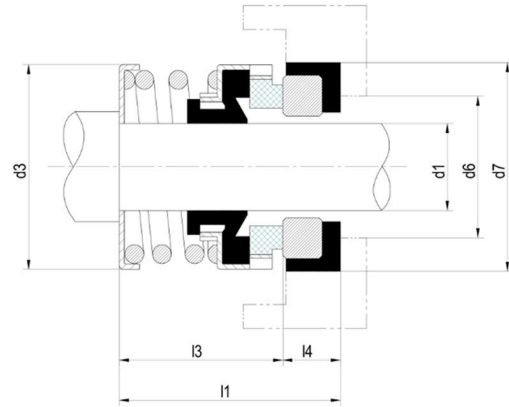

Type FF4-4 Dimensional Data

Dimension (inch)	d1 (mm)	d3 (mm)	l3 (mm)	d7 (mm)	l4 (mm)	d6 (mm)	l1 (mm)
0.500	12.70	22.00	31.75	25.40	7.93	19.05	39.68
0.625	15.80	26.00	34.93	31.75	10.28	23.80	45.21
0.750	19.10	32.00	34.93	34.93	10.28	26.98	45.21
0.875	22.20	36.00	36.50	38.10	10.28	30.15	46.78
1.000	25.40	39.00	41.28	41.28	11.10	33.32	52.38
1.125	28.60	42.00	42.85	44.44	11.10	36.50	53.95
1.250	31.70	46.00	42.85	47.63	11.10	39.70	53.95
1.375	34.90	49.00	42.85	50.80	11.10	42.84	53.95
1.500	38.10	54.00	42.85	53.98	11.10	46.05	53.95
1.625	41.20	59.00	50.80	60.33	12.70	50.80	63.50
1.750	44.40	61.00	50.80	63.50	12.70	53.97	63.50
1.875	47.60	64.00	53.98	66.68	12.70	57.15	66.68
2.000	50.80	66.00	53.98	69.85	12.70	60.32	66.68
2.125	53.90	69.00	60.32	76.20	14.28	60.32	74.60
2.250	57.10	78.00	60.32	79.38	14.28	61.90	74.60
2.375	60.30	80.00	63.50	82.55	14.28	67.39	77.78
2.500	63.50	83.00	63.50	85.73	14.28	68.00	77.78
2.625	66.60	85.00	69.85	85.73	15.90	71.42	85.75
2.750	69.80	90.00	69.85	88.90	15.90	74.60	85.75
2.875	73.00	95.00	73.03	95.25	15.90	77.77	88.93
3.000	76.20	99.00	73.03	98.43	15.90	80.95	88.93

CHARACTERISTICS

- Single Spring Seal
- Bellow Seal
- Double Directional
- Unbalanced

LIMIT OF APPLICATIONS

- Pressure : 12 bar
- Temperature : - 20 ~ 120 °C
- Speed : 10 m/s

MATERIALS

- Rotary Face : Car, SiC
- Stationary Face : Al-Oxide, SiC
- Secondary Seal : NBR, EPDM, VITON
- Springs : SS304
- Other Parts : SS304