


FSD Serie FF5

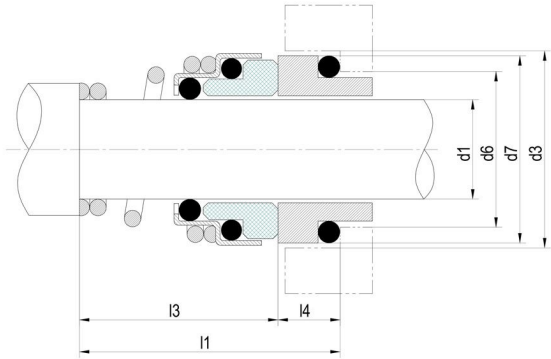

Type FF5 Dimensional Data (millimeter)						
d1	d3	l3	d7	l4	d6	l1
10	19.50	15.00	18.10	5.50	14.00	20.50
11	22.50	18.00	20.60	5.50	16.50	23.50
12	22.50	18.00	20.60	5.50	16.50	23.50
13	24.50	22.00	23.10	6.00	19.00	28.00
14	24.50	22.00	23.10	6.00	19.00	28.00
15	29.00	22.00	26.90	7.00	21.00	29.00
16	29.00	23.00	26.90	7.00	21.00	30.00
17	29.00	23.00	26.90	7.00	21.00	30.00
18	32.50	24.00	30.90	8.00	25.00	32.00
19	32.50	25.00	30.90	8.00	25.00	33.00
20	32.50	25.00	30.90	8.00	25.00	33.00
22	37.50	25.00	35.40	8.00	30.00	33.00
24	37.50	27.00	35.40	8.00	30.00	35.00
25	40.00	27.00	38.20	8.50	33.00	35.50
28	46.00	29.00	43.30	9.00	38.00	38.00
30	46.00	30.00	43.30	9.00	38.00	39.00
32	46.00	30.00	43.30	9.00	38.00	39.00
33	48.00	30.00	53.50	11.50	45.00	41.50
35	50.00	39.00	53.50	11.50	45.00	50.50
38	56.00	39.00	60.50	11.50	52.00	50.50
40	58.00	39.00	60.50	11.50	52.00	50.50

CHARACTERISTICS

- Single Spring Seal
- Conical Spring
- Single Directional
- Unbalanced

LIMIT OF APPLICATIONS

- Pressure : 10 bar
- Temperature : - 20 ~ 180 °C
- Speed : 20 m/s

MATERIALS

- Rotary Face : Al-Oxide, SiC, TC
- Stationary Face : Car, SiC, TC
- Secondary Seal : NBR, EPDM, VITON
- Springs : SS304
- Other Parts : SS304