


FSD Serie FF8

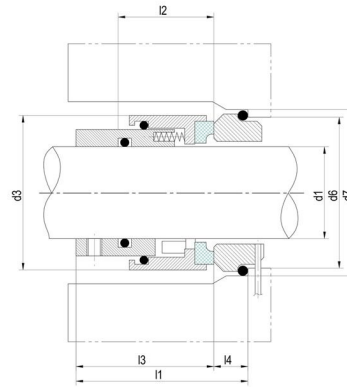

Type FF8 Dimensional Data (millimeter)							
d1	d3	l2	l3	d7	l4	d6	l1
18	34.00	18.00	30.00	33.00	10.00	27.00	40.00
20	36.00	18.00	30.00	35.00	10.00	29.00	40.00
22	38.00	18.00	30.00	37.00	10.00	31.00	40.00
24	40.00	18.00	30.00	39.00	10.00	33.00	40.00
25	41.00	18.00	30.00	40.00	10.00	34.00	40.00
28	44.00	18.00	32.50	43.00	10.00	37.00	42.50
30	46.00	18.00	32.50	45.00	10.00	39.00	42.50
32	48.00	18.00	32.50	48.00	10.00	42.00	42.50
33	49.00	18.00	32.50	48.00	10.00	42.00	42.50
35	50.90	18.00	32.50	50.00	10.00	44.00	42.50
38	54.80	18.00	34.00	56.00	11.00	49.00	45.00
40	58.00	18.00	34.00	58.00	11.00	51.00	45.00
42	58.00	18.00	34.00	61.00	11.00	54.00	45.00
43	61.00	18.00	34.00	61.00	11.00	54.00	45.00
45	61.00	18.00	34.00	63.00	11.00	56.00	45.00
48	64.40	18.00	34.00	66.00	11.00	59.00	45.00
50	67.60	18.00	34.50	70.00	13.00	62.00	47.50
53	70.80	18.00	34.50	73.00	13.00	65.00	47.50
55	73.00	18.00	34.50	75.00	13.00	67.00	47.50
58	77.20	18.00	34.50	78.00	13.00	70.00	47.50
60	77.20	18.00	34.50	80.00	13.00	72.00	47.50
63	78.30	18.00	34.50	83.00	13.00	75.00	47.50
65	88.20	18.00	36.00	85.00	13.00	77.00	49.00
68	88.20	18.00	36.00	90.00	15.30	81.00	51.30
70	91.40	18.00	36.00	92.00	15.30	83.00	51.30
75	97.70	18.00	36.00	97.00	15.30	88.00	51.30
80	100.90	18.00	36.00	105.00	15.70	95.00	51.70
85	107.30	18.00	36.00	110.00	15.70	100.00	51.70
90	110.40	18.00	36.00	115.00	15.70	105.00	51.70
95	113.40	18.00	36.00	120.00	15.70	110.00	51.70
100	120.00	18.00	36.00	125.00	15.70	115.00	51.70

CHARACTERISTICS

- Single Spring Seal
- Multiple Spring Seal
- Double Directional
- Balanced

LIMIT OF APPLICATIONS

- Pressure : 25 bar
- Temperature : - 30 ~ 220 °C
- Speed : 20 m/s

MATERIALS

- Rotary Face : Car, SiC, TC
- Stationary Face : Car, Al-oxide, SiC, SS, TC
- Secondary Seal : NBR, EPDM, VITON, FEP, KALREZ
- Springs : SS316/HC276, 316 Ti
- Other Parts : SS316, 316 Ti