


FSD Serie FF2

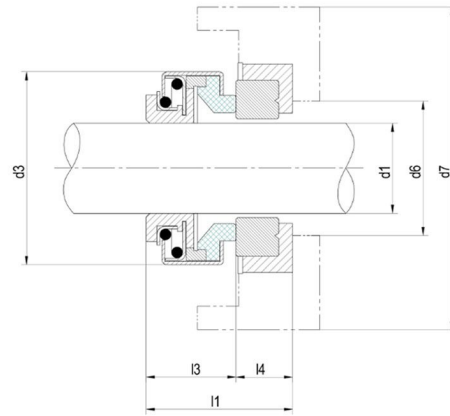

Type FF2 Dimensional Data (millimeter)						
d1	d3	l3	d7	l4	d6	l1
6	18.0	8.5	22.0	4.0	8.0	12.5
8	18.0	8.5	22.0	4.0	10.0	12.5
8	24.0	11.0	26.0	5.5/8	10.0	16.5/19
10	24.0	11.0	26.0	5.5/8	12.0	16.5/19
11	24.0	11.0	26.0	5.5/8	13.0	16.5/19
12	24.0	13.0	26.0	5.5/8	14.0	18.5/21
13	24.0	13.0	26.0	5.5/8	15.0	18.5/21
14	32.0	13.0	29.5/38	8.0	16.0	21.0
15	35.0	13.0	29.5/38	8.0	17.0	21.0
16	35.0	13.0	29.5/38	8.0	18.0	21.0
16	39.0	13.0	42.0	8.0	18.0	21.0
17	39.0	13.0	42.0	8.0	19.0	21.0
18	39.0	13.0	42.0	8.0	20.0	21.0
19	39.0	13.0	42.0	8.0	21.0	21.0
20	39.0	13.0	42.0	8.0	22.0	21.0
20	42.0	13.0	45.0	10.0	22.0	23.0
22	42.0	14.0	45.0	10.0	24.0	24.0
24	47.0	14.0	50.0	10.0	26.0	24.0
25	47.0	14.0	50.0	10.0	27.0	24.0
28	54.0	15.0	57.0	10.0	31.0	25.0
30	54.0	15.0	57.0	10.0	33.0	25.0
32	54.0	15.0	57.0	10.0	35.0	25.0
35	60.0	16.0	63.0	10.0	38.0	26.0
38	65.0	17.0	68.0	12.0	41.0	29.0
40	65.0	17.0	68.0	12.0	43.0	29.0
45	70.0	20.0	73.0	12.0	48.0	32.0
50	85.0	23.0	88.0	15.0	53.0	38.0
55	85.0	23.0	88.0	15.0	53.0	38.0
60	105.0	30.0	110.0	15.0	63.0	45.0
65	105.0	30.0	110.0	15.0	67.0	45.0
70	105.0	32.0	110.0	15.0	72.0	47.0

CHARACTERISTICS

- Single Spring Seal
- Bellow Seal
- Double Directional
- Unbalanced

LIMIT OF APPLICATIONS

- Pressure : 6 bar
- Temperature : - 20 ~ 120 °C
- Speed : 10 m/s

MATERIALS

- Rotary Face : Car, SiC, TC
- Stationary Face: Al-Oxide, Car, SiC
- Secondary Seal: NBR, EPDM, VITON
- Springs : SS304
- Other Parts : SS304